
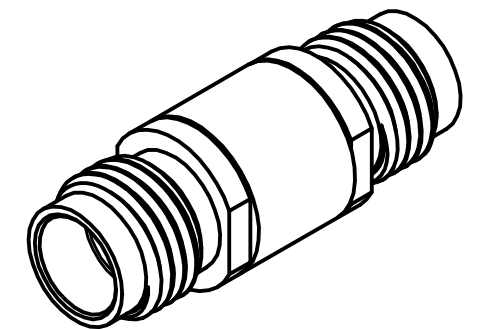


PRODUCT DATA SHEET

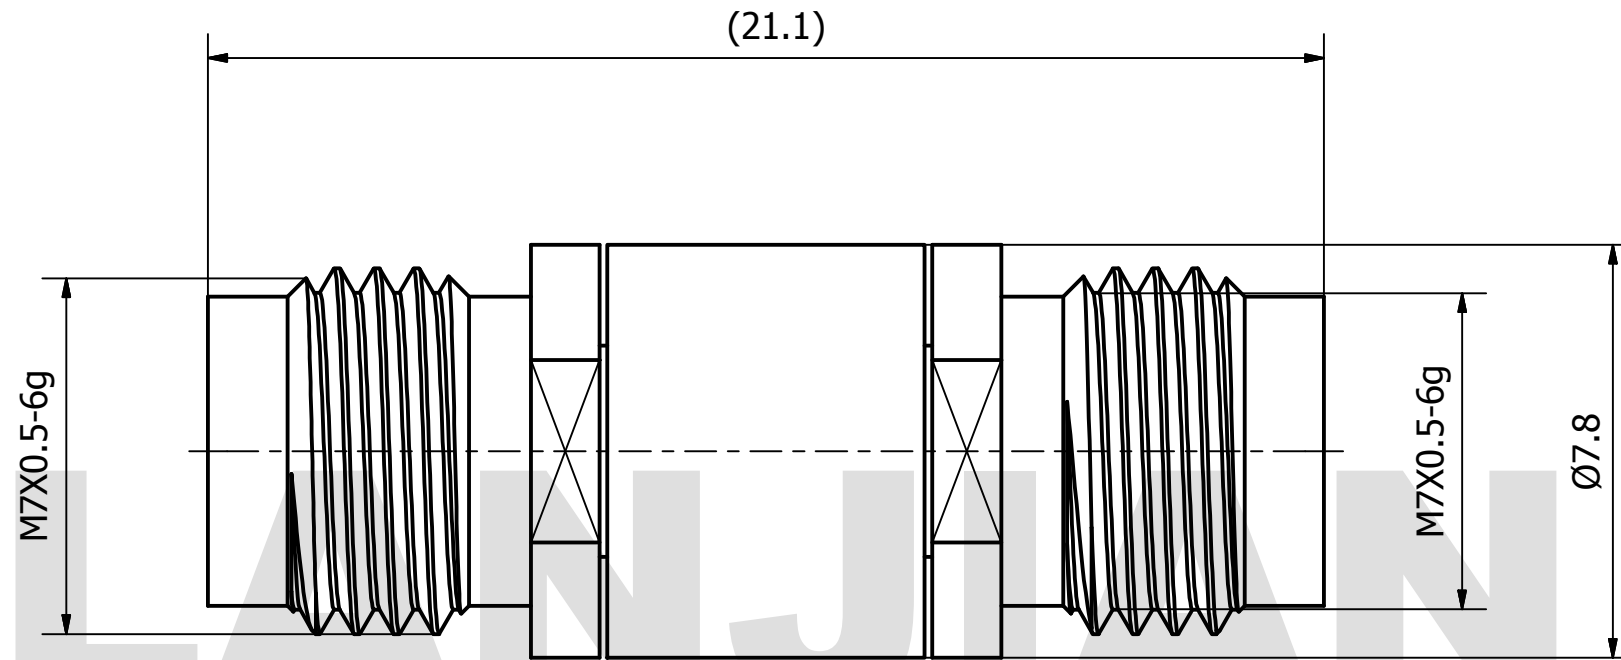

MATERIAL:
 BODY: STAINLESS STEEL PER AMS-5640,
 ALLOY UNS S30300
 CONTACT: BERYLLIUM COPPER PER ASTM B196.
 ALLOY NO. UNS C17300
 INSULATOR: PEI

PERFORMANCE:
 IMPEDANCE: 50 OHMS
 FREQUENCY: DC TO 65 GHz
 VSWR: ≤1.2

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"	MATERIAL :			 38 Hengtong Road, Xinqu Dingmao Zhenjiang, 212009, Jiangsu, P. R. China
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM			
	TOLERANCES :			
	X.X ± 0.10	ANGULAR : ± 30'	DEBURR AND BREAK SHARP EDGES	
	X.XX ± 0.05	FILLETS R/C : ± 0.10		
	X.XXX ± 0.005	SURFACE FINISH : Ra 0.8		
	NAME	DATE	SIGNATURE	
	DRAWN			
	CHK'D			
	APPV'D			
MFG				
PROJECTION		SIZE	SCALE	
		A3	7: 1	
DO NOT SCALE THE DRAWING			PAGE 1 / 1	

1.85-KK straight adaptor

DWG No. GCPZ3.640.U.003 REV. PAGE 1 / 1