


PRODUCT DATA SHEET

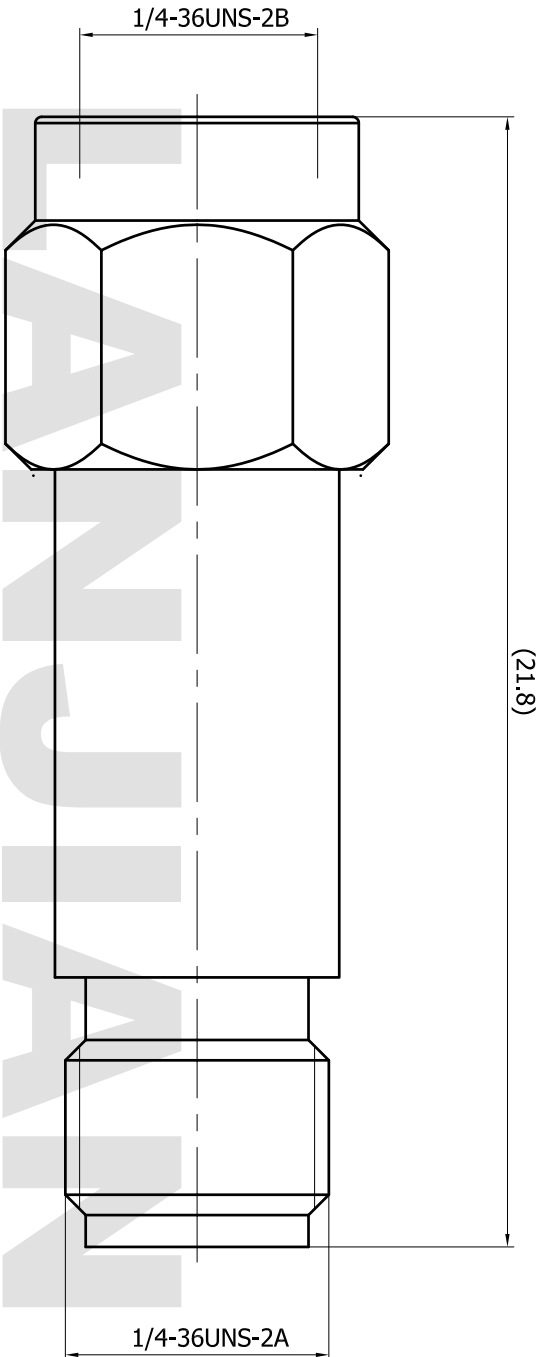

MATERIAL:
BODY: STAINLESS STEEL
CONTACT: BERYLLIUM COPPER
INSULATOR: PTFE

PERFORMANCE:
IMPEDANCE: 50 OHMS
FREQUENCY: DC TO 18 GHz
VSWR: ≤ 1.25
Attenuation Value :
1~10dB ± 0.6 dB
20dB ± 0.6 dB
30dB ± 0.6 dB

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"

MATERIAL :		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM	
TOLERANCES :			
X.X ±0.20	ANGULAR: ±1°	DEBURR AND	
X.XX ±0.10	FILETS R/C: ±0.10	BREAK SHARP	
X.XXX ±0.01	SURFACE FINISH: Ra 1.6	EDGES	
DRAWN	X.C.W	DATE	SIGNATURE
CHKD	H.Z.Y	03/21/2023	
APPRVD	H.Z.Y	03/21/2023	
MFG			
PROJECTION	SIZE	SCALE	
	A3	10:1	

LANJIAN ELECTRONICS
38 Hengtong Road, Xinqu Dingmao
Zhenjiang, 212009, Jiangsu, P. R. China

TITLE
ASMA-JK-XX

DWG No.

DO NOT SCALE THE DRAWING

REV.
A

DATE
1 / 1