


PRODUCT DATA SHEET

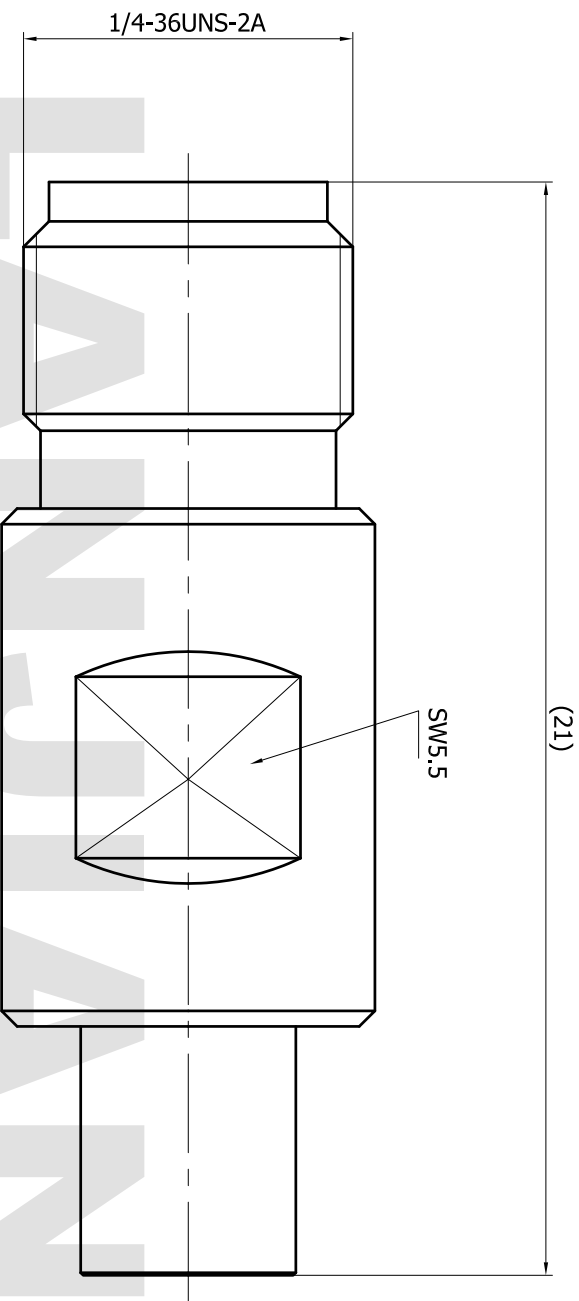

MATERIAL:
BODY: STAINLESS STEEL
CONTACT: BERYLLIUM COPPER
INSULATOR: NORYL

PERFORMANCE:
IMPEDANCE: 50 OHMS
FREQUENCY: DC TO 26.5 GHz
VSWR: ≤ 1.2

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"

MATERIAL :		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM	
TOLERANCES :			
XX ±0.20	ANGULAR: ±1°	DEBURR AND	
XXX ±0.10	FILLETS R/C: ±0.10	BREAK SHARP	
X.XXX ±0.01	SURFACE FINISH: Ra 1.6	EDGES	
DRAWN	X.C.W	DATE	SIGNATURE
CHKD	H.Z.Y	04/21/2022	
APPRVD	H.Z.Y	04/21/2022	
MFG			
PROJECTION		SIZE	SCALE
		A3	8:1

LANJIAN ELECTRONICS
38 Hengtong Road, Xinqu Dingmao
Zhenjiang, 212009, Jiangsu, P. R. China

TITLE
3.5/SMP-KJ

DWG No. GCPZ3.640.F.021
DO NOT SCALE THE DRAWING

REV. A
1 / 1