PRODUCT DATA SHEET

推荐的安装孔尺寸

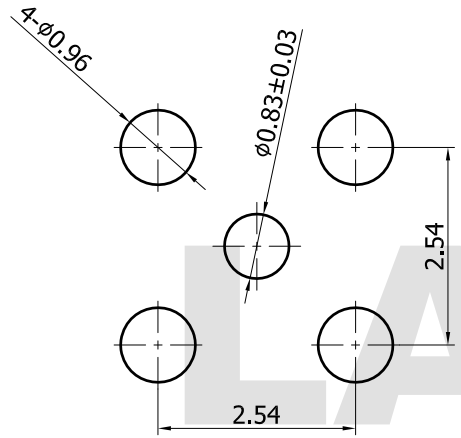

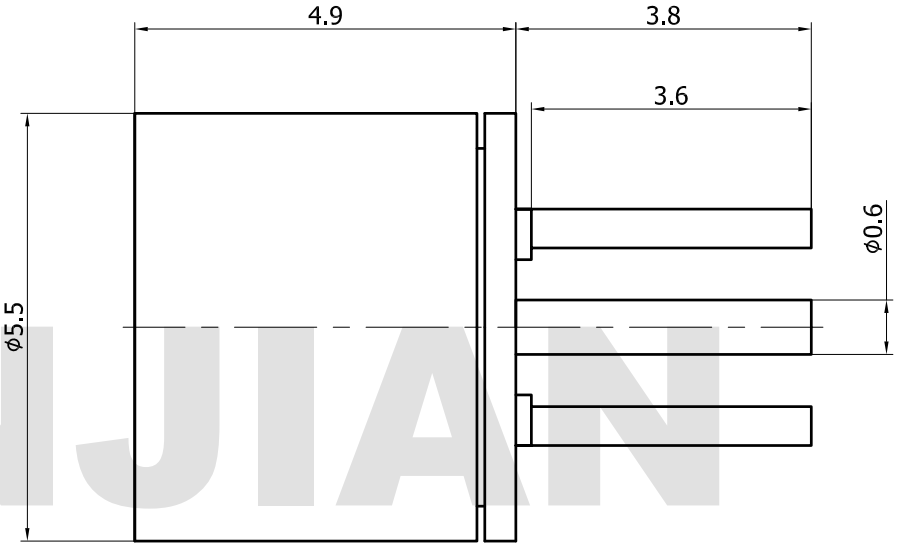

LANJIAN

MATERIAL:

BODY:	STAINLESS STEEL
CONTACT:	BERYLLIUM COPPER
INSULATOR:	PTFE

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQUENCY:	DC TO 40 GHz
VSWR:	≤1.40

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"

MATERIAL :

UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM

TOLERANCES :

X.X ±0.20 ANGULAR : ±1°
X.XX ±0.10 FILLETS R/C : ±0.10
X.XXX ±0.01 SURFACE FINISH : Ra 1.6
DEBURR AND BREAK SHARP EDGES

	NAME	DATE	SIGNATURE
DRAWN	X.C.W	11/24/2022	
CHK'D	H.Z.Y	11/24/2022	
APPV'D	H.Z.Y	11/24/2022	
MFG			

PROJECTION | SIZE A3 | SCALE 15:1

LANJIAN ELECTRONICS
38 Hengtong Road, Xinqu Dingmao
Zhenjiang, 212009, Jiangsu, P. R. China

TITLE

SMP-JHD6

DWG No. GCPZ3.650.G.004 | REV. B

DO NOT SCALE THE DRAWING | PAGE 1 / 1