


# PRODUCT DATA SHEET

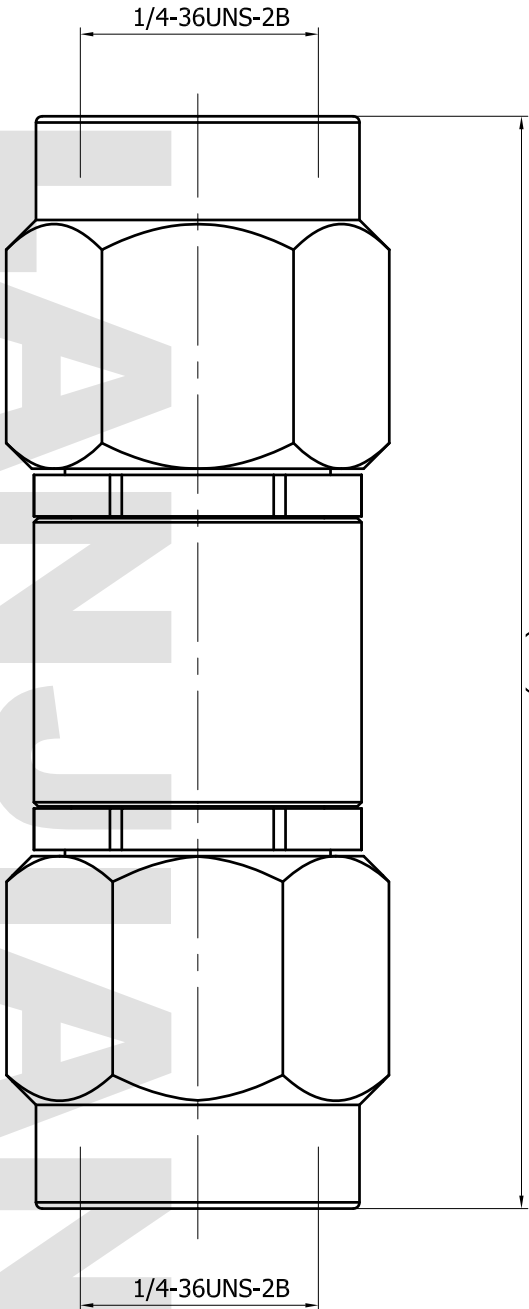

**MATERIAL:**  
BODY: STAINLESS STEEL  
CONTACT: BERYLLIUM COPPER  
INSULATOR: PTFE

**PERFORMANCE:**  
IMPEDANCE: 50 OHMS  
FREQUENCY: DC TO 26.5 GHZ  
VSWR:  $\leq 1.25$

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"

MATERIAL :		UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM	
TOLERANCES :		ANGULAR : $\pm 1^\circ$	
XX	$\pm 0.20$	XX	$\pm 0.10$
XXX	$\pm 0.10$	XXX	$\pm 0.10$
XXXX	$\pm 0.01$	XXXX	$\pm 0.01$
SURFACE FINISH : Ra 1.6		DEBURR AND BREAK SHARP EDGES	
NAME	DATE	SIGNATURE	
DRAWN X.C.W	04/21/2022		
CHKD H.Z.Y	04/21/2022		
APPRVD H.Z.Y	04/21/2022		
MFG			
PROJECTION	SIZE	SCALE	
	A3	10:1	

**LANJIAN ELECTRONICS**  
38 Hengtong Road, Xinqu Dingmao  
Zhenjiang, 212009, Jiangsu, P. R. China

TITLE  
**SMA-JJ-26.5GA**

DWG No. GCPZ3.640.A.065  
REV. A

DO NOT SCALE THE DRAWING

6 5 4 3 2 1

A B C D