


# PRODUCT DATA SHEET

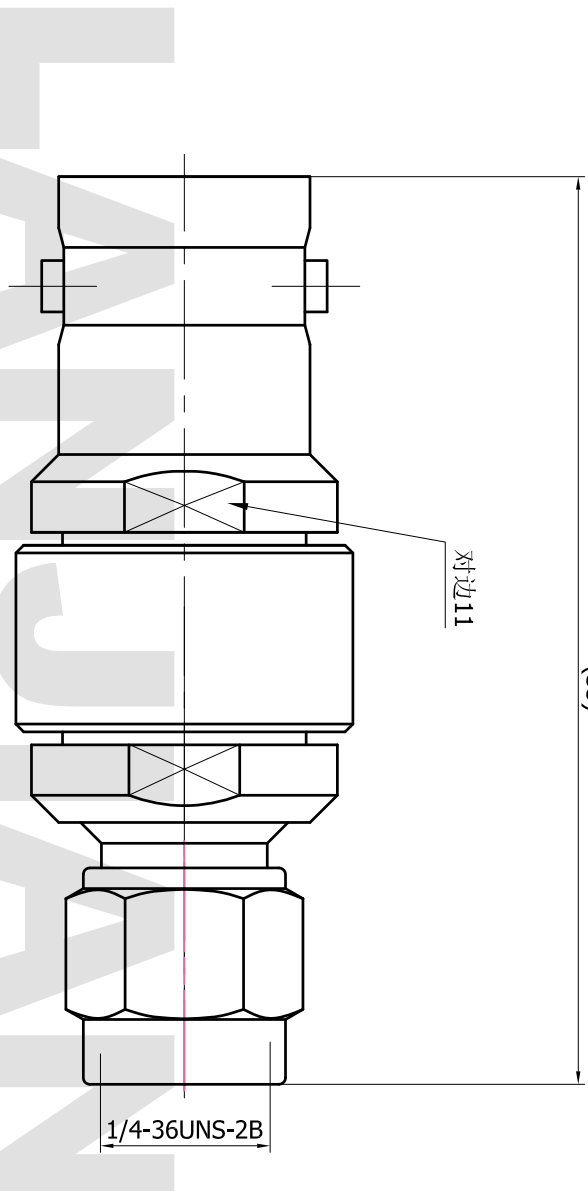

**MATERIAL:**  
BODY: STAINLESS STEEL  
CONTACT: BERYLLIUM COPPER  
INSULATOR: NORYL

**PERFORMANCE:**  
IMPEDANCE: 50 OHMS  
FREQUENCY: DC TO 18 GHz  
VSWR:  $\leq 1.2$

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"

MATERIAL : UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM		TOLERANCES :	
XX	$\pm 0.20$	ANGULAR :	$\pm 1^\circ$
XXX	$\pm 0.10$	FILETS R/C :	$\pm 0.10$
X.XXX	$\pm 0.01$	SURFACE FINISH :	Ra 1.6
NAME	DATE	DEBURR AND BREAK SHARP EDGES	SIGNATURE
DRAWN X.C.W	04/21/2022		
CHKD H.Z.Y	04/21/2022		
APPRVD H.Z.Y	04/21/2022		
MFG			
PROJECTION	SIZE	SCALE	
	A3	8:1	

**LANJIAN ELECTRONICS**  
38 Hengtong Road, Xinqu Dingmao  
Zhenjiang, 212009, Jiangsu, P. R. China

TITLE  
**3.5/BNC-JK-G**

DWG No. GCDZ3.640.F.012  
REV. A

DO NOT SCALE THE DRAWING  
REV. 1 / 1