
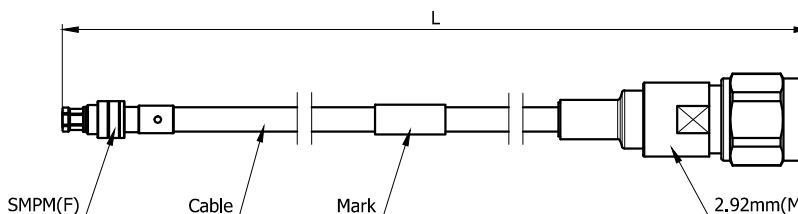


PRODUCT DATA SHEET

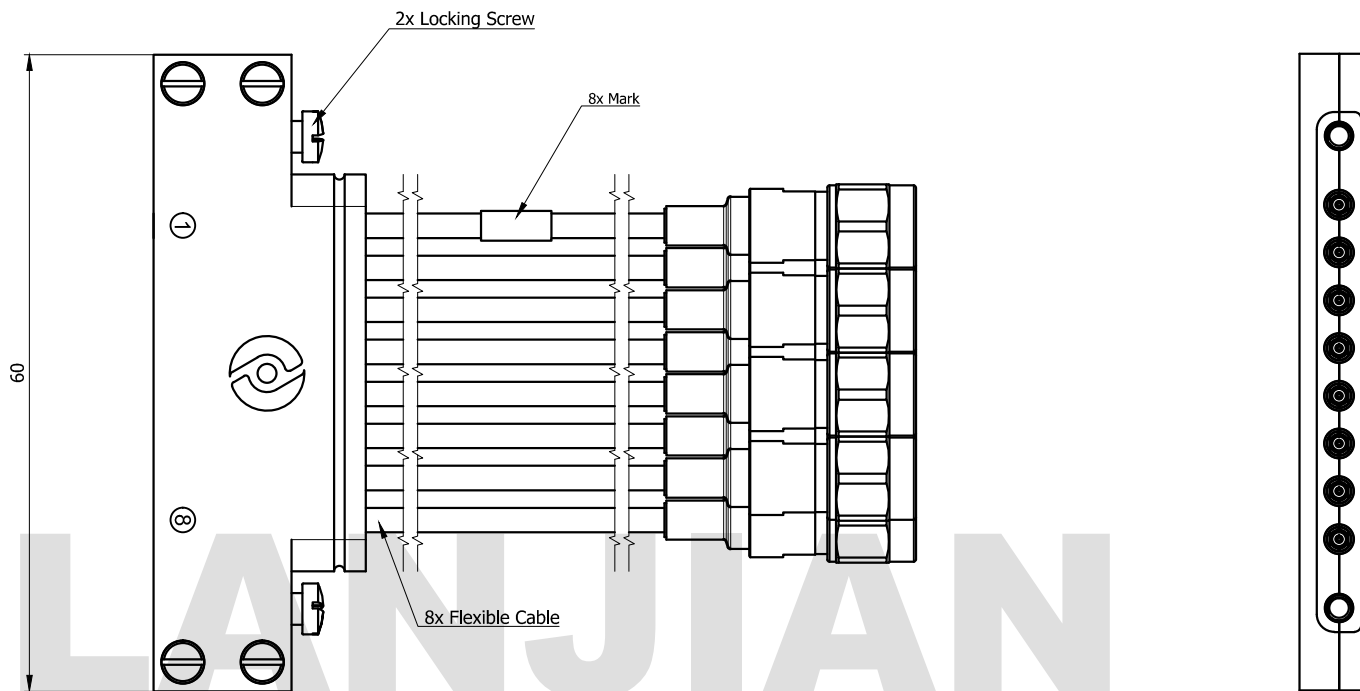

PRODUCT INFORMATION	
CONNCTOR 1	SMPM-Female
CONNCTOR 2	2.92-Male
FREQUENCY	DC-40GHz
IMPEDANCE	50Ω
TEMPERATURE	-55~+85℃
QUANTITY OF CHANNELS	1*8
CABLE TYPE	Gore 89
CABLE DIAMETER	2.2mm
CABLE LENGTH	L
VSWR	≤ 1.35
ATTENUATION	4.46dB/m, @40GHz
PHASE MATCHING	+/-2ps(1ps optional)
MINIMUM BEND RADIUS	12.7mm
LIFE TIME	500

DRAWING NUMBER	TITLE	L(inch)	L(mm)
GCPZ3.670.C.032-1	HSMC-18-SMPMK-2.92J-153	6	153
GCPZ3.670.C.032-2	HSMC-18-SMPMK-2.92J-229	8	229
GCPZ3.670.C.032-3	HSMC-18-SMPMK-2.92J-305	12	305

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM "LANJIAN ELECTRONICS"

MATERIAL :			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS IN MM			
TOLERANCES :			
X.X	± 0.10	ANGULAR : ± 30°	DEBURR AND BREAK SHARP EDGES
X.XX	± 0.05	FILLETS R/C : ± 0.10	
X.XXX	± 0.005	SURFACE FINISH : Ra 0.8	
NAME	DATE	SIGNATURE	
DRAWN YaoJiang	11/15/2018		
CHK'D HongZhongYan	11/15/2018		
APP'V'D HongZhongYan	11/15/2018		
MFG			
PROJECTION	SIZE	SCALE	
	A3	2:1	

LANJIAN ELECTRONICS

38 Hengtong Road, Xinqu Dingmao
Zhenjiang, 212009, Jiangsu, P. R. China

TITLE	
HSMC-18-SMPMK-2.92J-L	
DWG No.	REV.
GCPZ3.670.C.032-X	A
DO NOT SCALE THE DRAWING	
PAGE 1 / 1	